
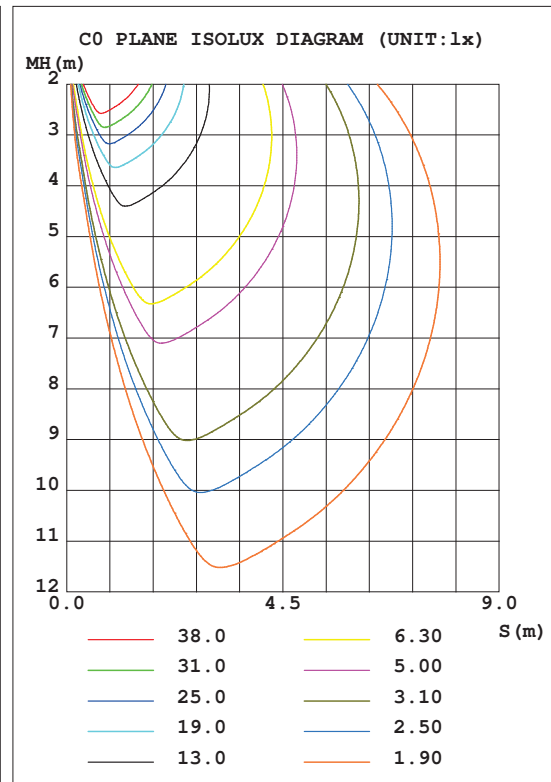


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.43V I:0.1895A P:41.210W PF:0.9437 Freq:50.00Hz Lamp Flux:5208x1 lm		
NAME: OVI - PENDANT	TYPE: LINEAR LIGHTING	WEIGHT:
SPEC.: NW	DIM.: 1245 x Ø106	SERIAL No.: 4315
MFR.: K-LITE	SUR.:	Shielding Angle: 360°

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 67.00 lm/W
MODEL	KL-3462	I _{max} (cd)	317.2	S/MH (C0/180)	12.81	
NOMINAL POWER (W)	36	LOR (%)	53.0	S/MH (C90/270)	13.45	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2761.2	η UP, DN (C0-180)	10.3, 16.9	
NOMINAL FLUX (lm)	5208	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	9.8, 16.0	
LAMPS INSIDE	1	η up (%)	20.1	CIBSE SHR NOM	0.75	
TEST VOLTAGE (V)	230	η down (%)	32.9	CIBSE SHR MAX	0.90	

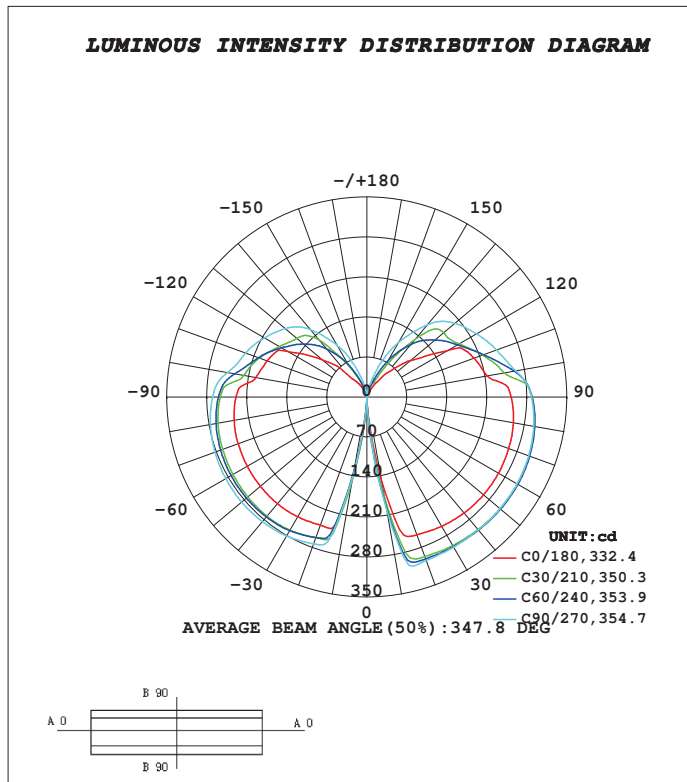

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 16 March 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: