
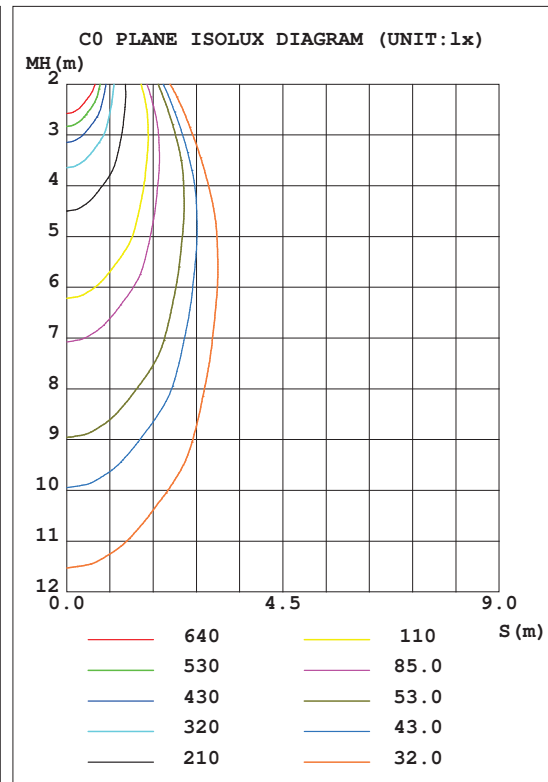


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.39V I:0.1789A P:40.338W PF:0.9788 Freq:50.00Hz Lamp Flux:5494.5x1 lm		
NAME: REVO SERIES	TYPE:LINEAR LIGHTING	WEIGHT:
SPEC.:NW, NICHIA	DIM.: 1188 x 36 x 75	SERIAL No.:4313
MFR.: K-LITE	SUR.:	Shielding Angle:50°

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 78.23 lm/W
MODEL	KL-3465	I _{max} (cd)	4422	S/MH (C0/180)	0.87	
NOMINAL POWER (W)	40	LOR (%)	57.4	S/MH (C90/270)	0.67	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3155.7	η UP, DN (C0-180)	0.0, 27.0	
NOMINAL FLUX (lm)	5494.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 30.4	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE (V)	230	η down (%)	57.4	CIBSE SHR MAX	0.75	

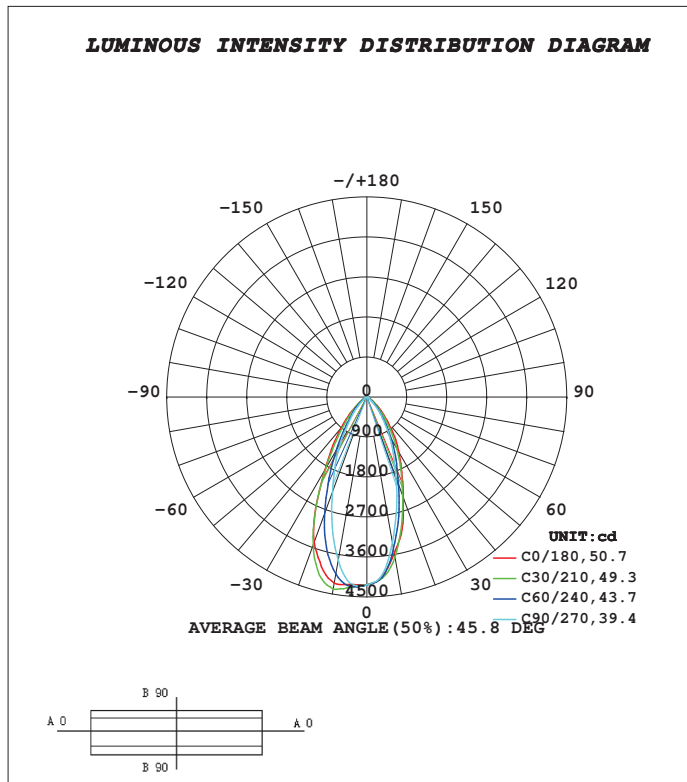

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 15 March 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: