


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.45V I:0.1205A P:26.888W PF:0.9684 Freq:49.99Hz Lamp Flux:3848x1 lm		
NAME: CYLIN MIDI	TYPE:CEILING LUMINAIRES	WEIGHT:
SPEC.:WW, OSRAM	DIM.: Ø166 x 160	SERIAL No.:4390
MFR.: K-LITE	SUR.:	Shielding Angle:TYPE IV

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3629	Imax (cd)	1432	S/MH (C0/180)	1.68
NOMINAL POWER (W)	30	LOR (%)	69.3	S/MH (C90/270)	0.40
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2666.7	η UP, DN (C0-180)	0.0,55.6
NOMINAL FLUX (lm)	3848	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,13.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	69.3	CIBSE SHR MAX	1.30

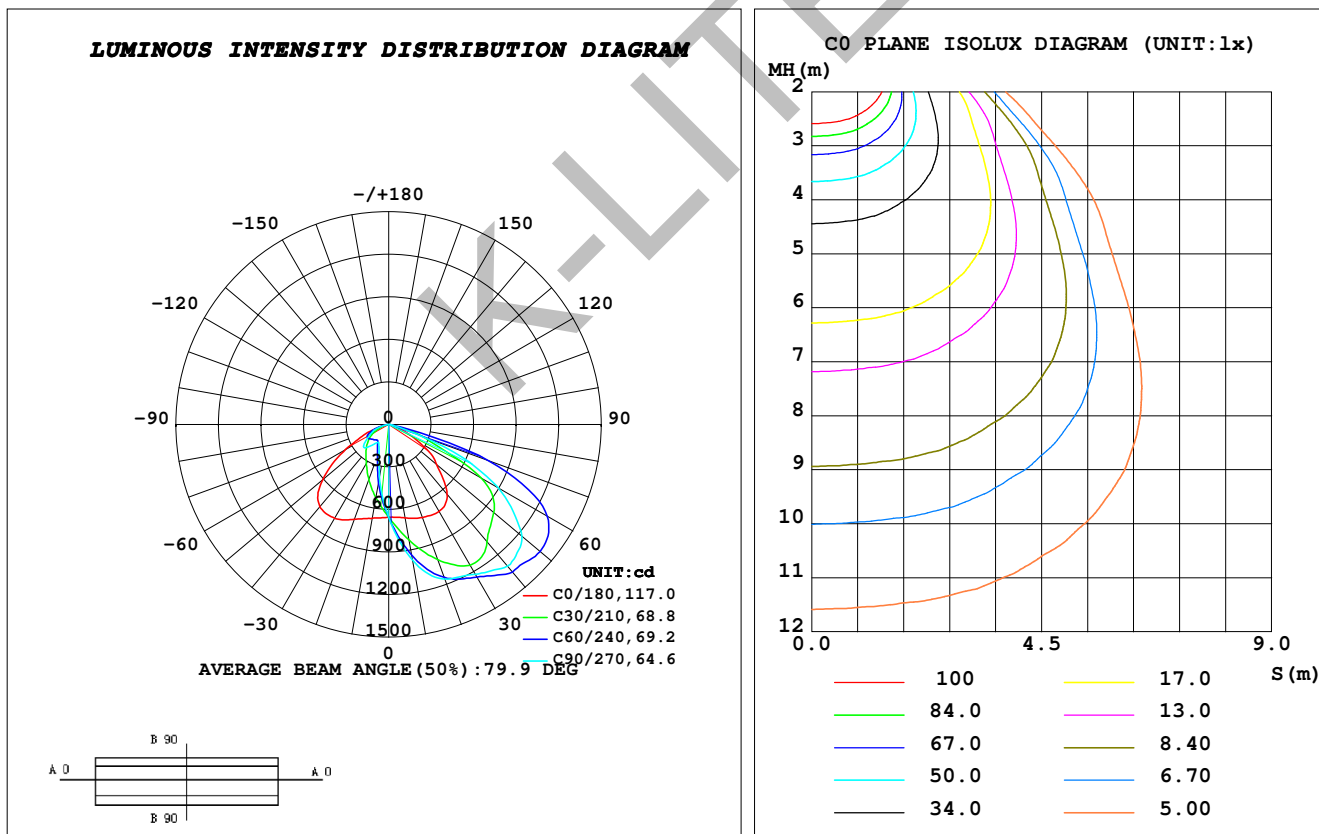

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 04 April 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.825m [K=1.0000]**  
**Remarks:**