


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.48V I:0.0309A P:6.9582W PF:0.9768 Freq:49.99Hz Lamp Flux:682.5x1 lm		
NAME: WALL DENA	TYPE:WALL LUMINAIRES	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 111 x 108 x 94	SERIAL No.:2340
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3665	I _{max} (cd)	271.4	S/MH (C0/180)	4.27
NOMINAL POWER (W)	6	LOR (%)	55.2	S/MH (C90/270)	0.00
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	376.83	η UP, DN (C0-180)	0.0, 27.3
NOMINAL FLUX (lm)	682.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 27.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	55.2	CIBSE SHR MAX	1.00

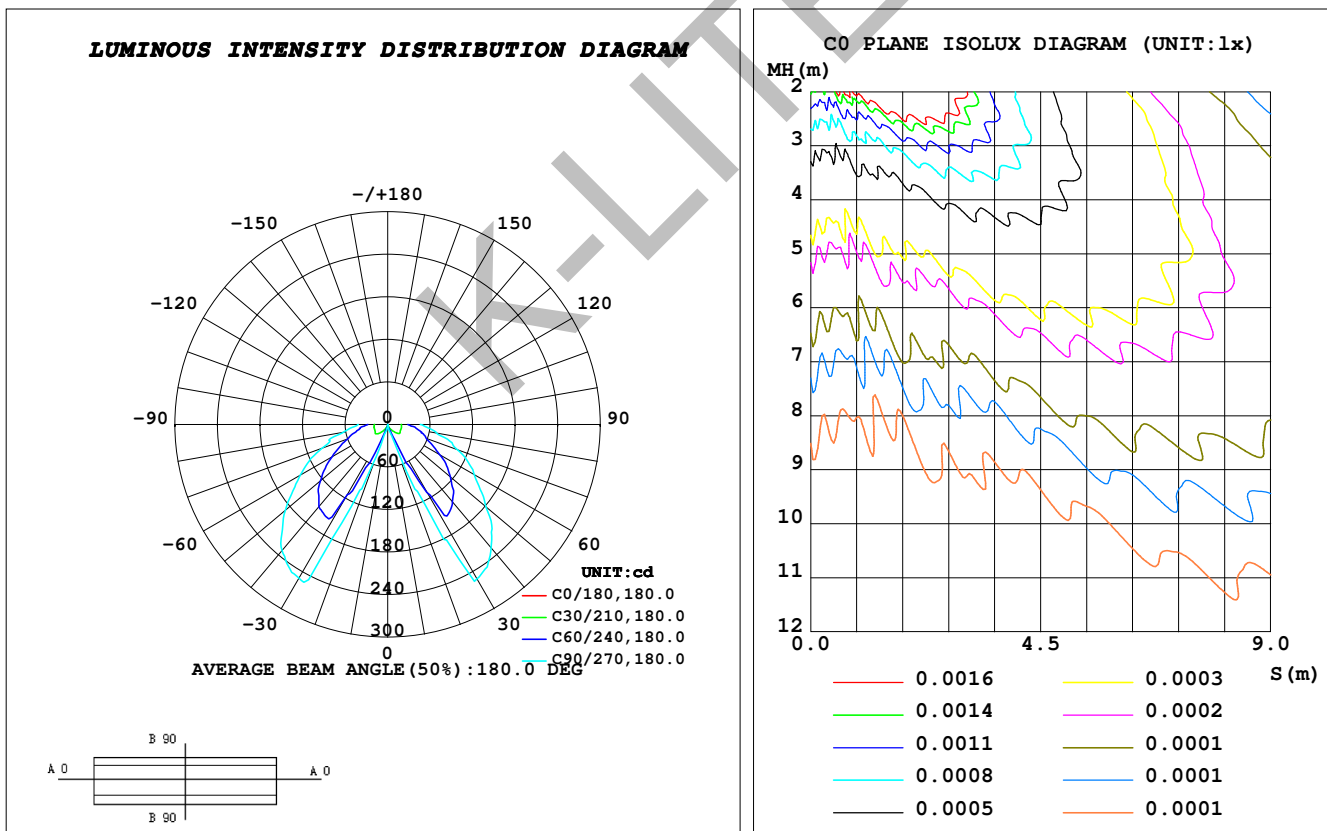

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 23 November 2020

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks: