

K-LITE

REVO 600

Power : 25W
Length: 612mm

Upto
120
lm/w

TW

Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



198-264V 50Hz

Options

- Through wiring
- Dimmable options



L1: Matt Black, UGR <16

Beam Angle



50°

L2: Vacuum Metalized Chrome Finish, UGR <12

Beam Angle




34°



48°

Accessories




Canopy Kit


For control unit
Bespoke Colour Options

K-LITE 12


PENDANT
DIRECT



PENDANT
DIRECT / INDIRECT



Dimension
in mm

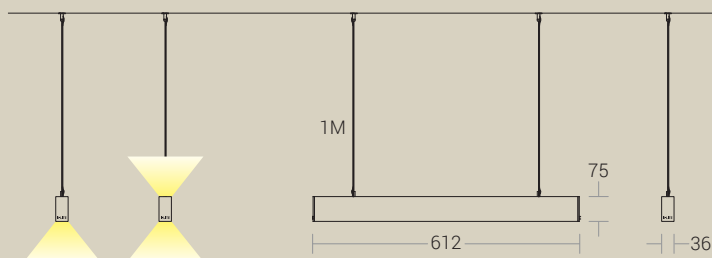


Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution

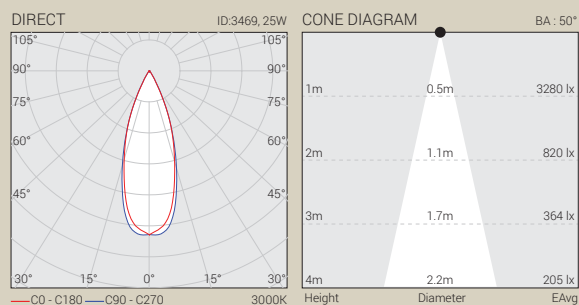

L1



L2



Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 50° / 34°, 48°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Matt Black / Vacuum Metalized Chrome Finish
UGR	: L1 - <16 / L2 - <12

Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Surface / Suspended
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Pendant - Direct

ID	Wattage	Lens Option	Dimension (mm)
3469	25W	L1 / L2	612 x 36 x 75

Pendant Direct : ID + L1
Pendant Direct-Indirect : ID + L1

Pendant - Direct-Indirect

ID	Wattage	Lens Option	Dimension (mm)
3452	25W & 10W	L1 / L2	612 x 36 x 75