

K-LITE

POWER WASH

Power : 40W 80W
Length : 1214 mm 2400 mm

Upto
100
lm/w

Features

- NICHIA LED's
- 3000K / 4000K / 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs




198-264V 50Hz

Options



- Through wiring
- Dimmable options



RECESSED



Dimension
in mm





Housing Colour



High-quality aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture

Light
Distribution



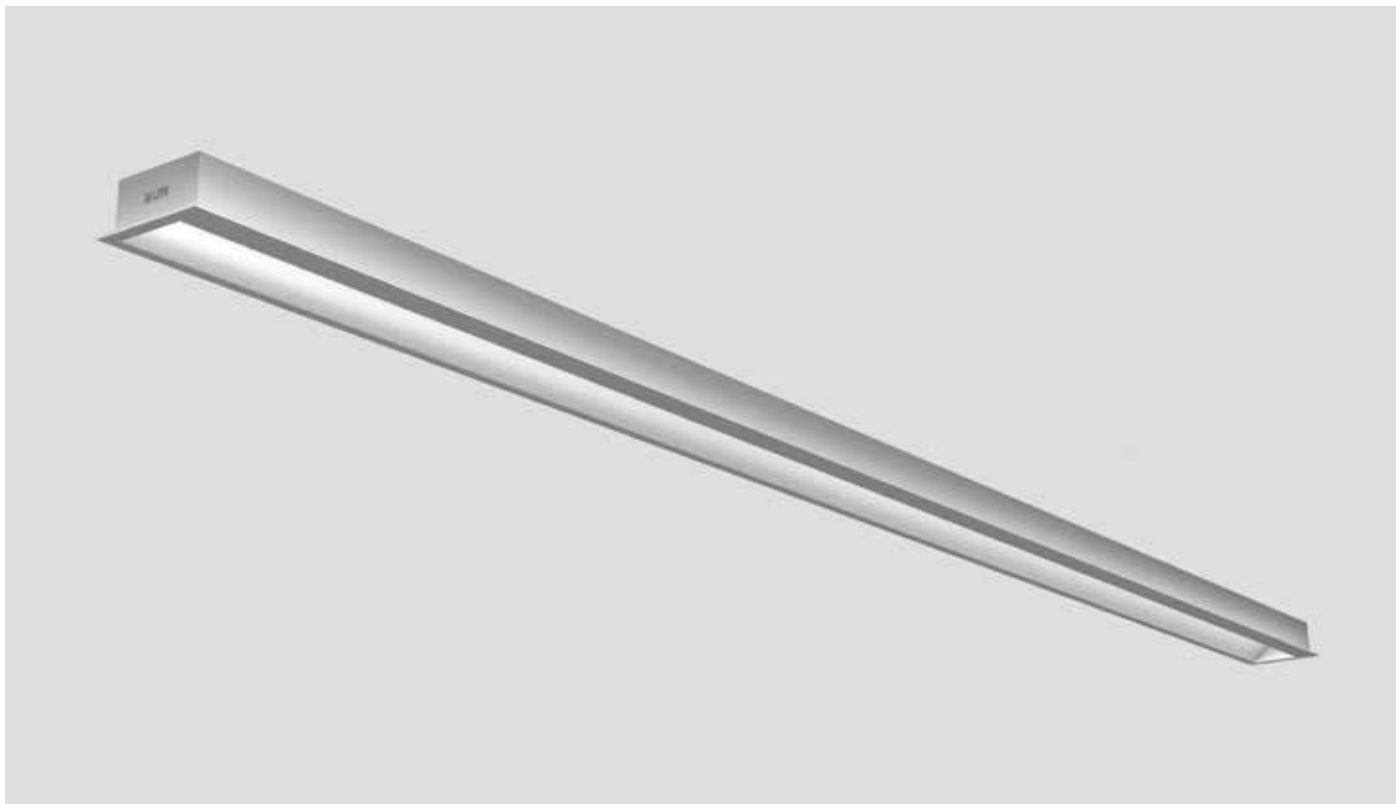

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: +25°C~+55°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Diffuser/Lens Material	: PC Opal diffuser
UGR	: <19

Physical

Body	: High-Grade Aluminium with Endcaps
Mounting	: Recessed
Finish	: White(RAL9016) Black(RAL9005) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Ordering Guide

Recess - Direct

ID	Wattage	Dimension (mm)	C.O.D
3394	40W	1214 x 58 x 27	1203 x 48
3395	80W	2400 x 58 x 27	2389 x 48