

K-LITE

Revo-R

Power : Upto 20W Upto 40W Upto 80W
Length : 612mm 1212mm 2412mm



Features

- Nichia LED's
- CRI Ra>80 (>90 On Request)
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M (2M available on request)

Options

- CCT : TW 2700K to 5700K



D03 : Vacuum Metalized Chrome Finish, UGR <12


Beam Angle




Accessories



Canopy Kit for Dimmable options



Dimension in mm

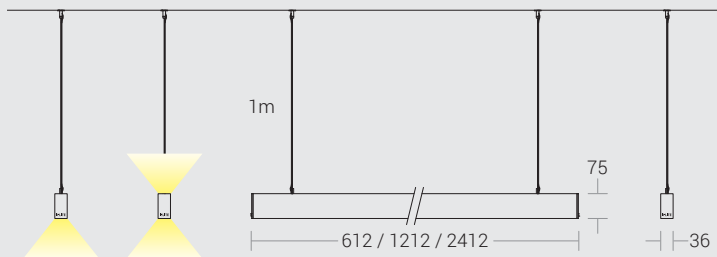

Housing Colour




Extruded aluminium with powder coated finish in
RAL9004 Signal Black fine texture | RAL9016 Traffic White fine texture |
RAL 9007 Grey aluminium fine texture

Light Distribution refer online



D03 - Metalized Chrome

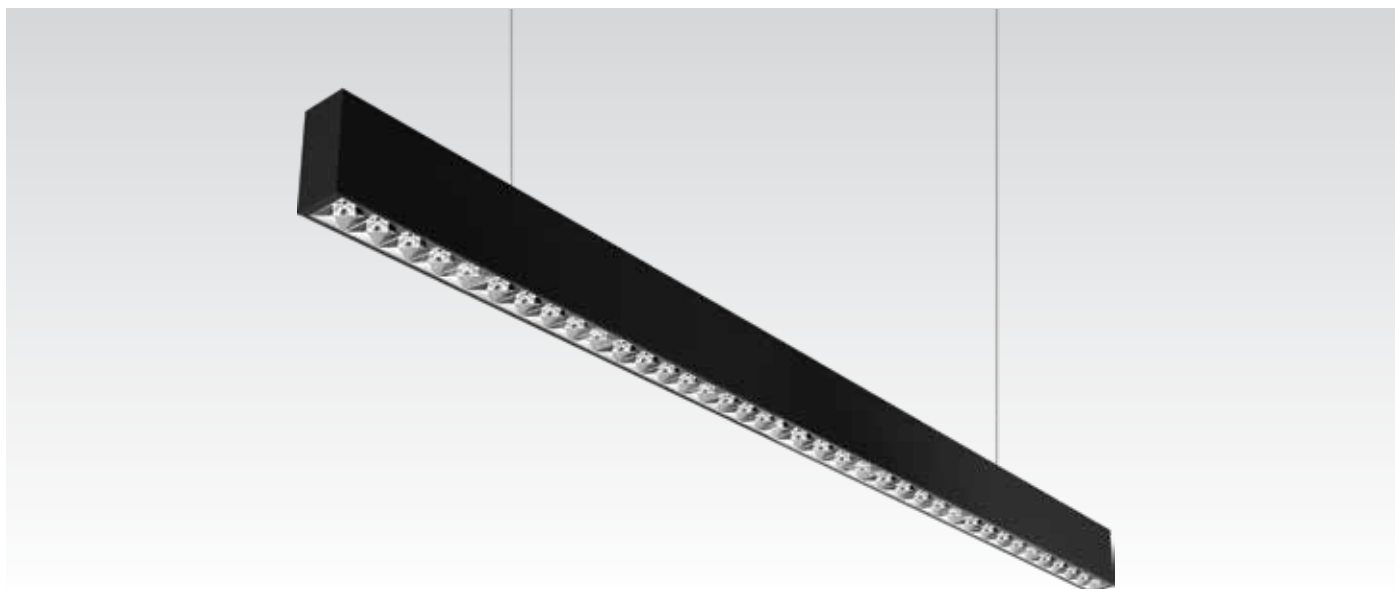

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: Nichia
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 12°, 20°, 34°, 48°, 60°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: Extruded Aluminium with Die-cast Endcaps
Mounting	: Surface / Pendant
Finish	: RAL 9004 Signal black RAL 9016 Traffic White RAL 9007 Grey aluminium

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%



Ordering Guide

Pendant - Direct / Surface

ID	Wattage	Dimension (mm)
3469	Upto 20W	612 x 36 x 75
3469	Upto 40W	1212 x 36 x 75
3469	Upto 80W	2412 x 36 x 75

Pendant - Direct-Indirect

ID	Wattage	Dimension (mm)
3469	Upto 20W & 8W	612 x 36 x 75
3469	Upto 40W & 15W	1212 x 36 x 75
3469	Upto 80W & 30W	2412 x 36 x 75