

# K-LITE

## Rio

Power : Upto 40W Upto 80W  
Length : 612mm 1212mm



### Features

- Nichia LED's
- CRI Ra>80 (>90 On Request)
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M (2M available on request)

### Options

- CCT : TW 2700K to 5700K



D03 : Vaccum Metalized Chrome Finish, UGR <12

Beam Angle




### Accessories




250 x 56 x 34  
Canopy Kit for Control gear

K-LITE



### Dimension in mm

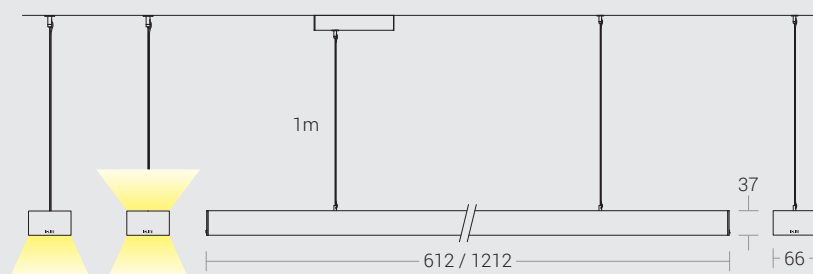

### Housing Colour




Extruded aluminium with powder coated finish in  
RAL9004 Signal Black fine texture | RAL9016 Traffic White fine texture |  
RAL 9007 Grey aluminium fine texture

Light Distribution refer online



D03 - Metalized Chrome

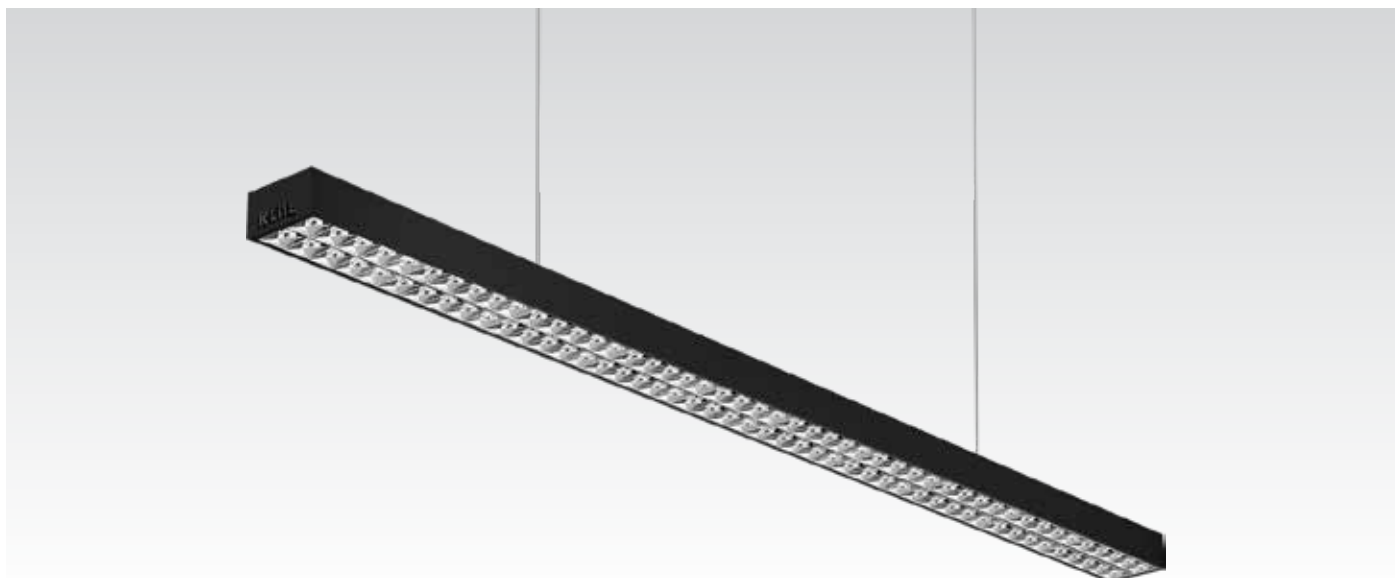

## Technical Specifications

### General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

### Light Source

Light Source	: Nichia
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

### Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 12°, 20°, 34°, 48°, 60°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish
UGR	: <12

### Physical

Body	: Extruded Aluminium with Die-cast Endcaps
Mounting	: Pendant
Finish	: RAL 9004 Signal black RAL 9016 Traffic White RAL 9007 Grey aluminium

### Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: Upto 3KV
Efficiency	: >85%



## Ordering Guide

### Pendant - Direct

ID	Wattage	Dimension (mm)
3474	Upto 40W	612 x 66 x 37
3474	Upto 80W	1212 x 66 x 37

### Pendant - Direct-Indirect

ID	Wattage	Dimension (mm)
3474	Upto 40W & 20W	612 x 66 x 37
3474	Upto 80W & 40W	1212 x 66 x 37