

"Kayal Mini" pathway luminaire, is an innovative design options to provide visual integration with the environment. High Brightness, LED Light source do not pose any environment risks. Designed for highest efficiency in terms of more lumens at reduced wattages contributing to a Greener World. Product offered asymmetrical light distribution.

Product Description

- Luminaire body made of extruded aluminium alloy (grade 6063) with die cast aluminium components and non corrosive SS fasteners.
- Clear toughened glass.
- Luminaire integrated with 30W LED.
- Suitable for mounting on 76mm / 88.9mm OD pipe.
- Extruded aluminium mounting pipe for easy installation onto the pole.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : ≥ 70
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24372-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



Product Benefits

- High luminous efficiency at reduced wattage.
- Elegance, Functionality.
- Corrosion resistant and Maintenance free.
- Quick installation and low assembly costs.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Illuminating parks, Gardens, Private driveways, Commercial complex, Pathways in Residential buildings & office complex.

Available Finish

Pure polyester powder coated

RAL 9004 Black

RAL 9007 Grey aluminium

RAL 7016 Anthracite grey

Graphite grey





DECORA VOGUE, GUJARAT



Technical Specifications

General

| | |
|-----------------------|--------------------|
| ID | : 24372 |
| System Wattage | : 30W LED |
| Driver Integral | : Constant Current |
| Operating Voltage | : 100-277Vac |
| Operating Temperature | : -15°C~+50°C |

Light Source

| | |
|------------------------|---------------------------------|
| Light Source | : LUMILEDS |
| CRI (Ra) | : >70 |
| LED Colour Temperature | : 2700K / 3000K / 4000K / 5700K |

Physical


| | |
|----------|---|
| Body | : Extruded Aluminium |
| Diffuser | : Clear Toughened Glass |
| Mounting | : Suitable for mounting on Ø76 / Ø88.9mm |
| Finish | : Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey |

Driver

| | |
|------------------|--------------|
| Power Supply | : Integral |
| Input Voltage | : 230-240Vac |
| Frequency | : 50-60Hz |
| Power Factor | : >0.95 |
| THD | : <10% |
| Surge Protection | : 4KV |
| Efficiency | : >85% |

Optical Performance

| | |
|--------------------|-----------|
| Light Distribution | : Type II |
|--------------------|-----------|



"Kayal Mini" pathway luminaire, is an innovative design options to provide visual integration with the environment. High Brightness, LED Light source do not pose any environment risks. Designed for highest efficiency in terms of more lumens at reduced wattages contributing to a Greener World. Product offered asymmetrical light distribution.

Product Description

- Luminaire body made of extruded aluminium alloy (grade 6063) with die cast aluminium components and non corrosive SS fasteners.
- Clear toughened glass.
- Luminaire integrated with 60W LED.
- Suitable for mounting on 76mm / 88.9mm OD pipe.
- Extruded aluminium mounting pipe for easy installation onto the pole.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : ≥ 70
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24374-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



Product Benefits

- High luminous efficiency at reduced wattage.
- Elegance, Functionality.
- Corrosion resistant and Maintenance free.
- Quick installation and low assembly costs.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Illuminating parks, Gardens, Private driveways, Commercial complex, Pathways in Residential buildings & office complex.

Available Finish


Pure polyester powder coated

RAL 9004 Black

RAL 9007 Grey aluminium

RAL 7016 Anthracite grey

Graphite grey

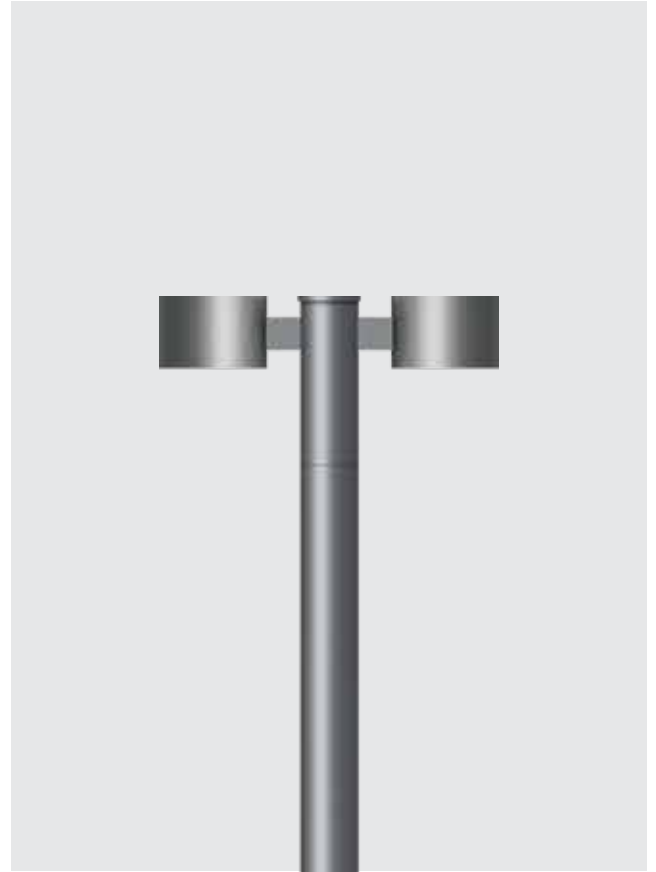



RAJHANS CREMONA, SURAT, GUJARAT



Technical Specifications

General

| | |
|-----------------------|--------------------|
| ID | : 24374 |
| System Wattage | : 60W LED |
| Driver Integral | : Constant Current |
| Operating Voltage | : 100-277Vac |
| Operating Temperature | : -15°C~+50°C |

Physical

| | |
|----------|---|
| Body | : Extruded Aluminium |
| Diffuser | : Clear Toughened Glass |
| Mounting | : Suitable for mounting on Ø76 / Ø88.9mm |
| Finish | : Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey |

Light Source

| | |
|------------------------|----------------------------------|
| Light Source | : LUMILEDS |
| CRI (Ra) | : >70 |
| LED Colour Temperature | : 2700K / 3000K / 4000K 5700K |

Driver

| | |
|------------------|--------------|
| Power Supply | : Integral |
| Input Voltage | : 230-240Vac |
| Frequency | : 50-60Hz |
| Power Factor | : >0.95 |
| THD | : <10% |
| Surge Protection | : 4KV |
| Efficiency | : >85% |

Optical Performance

| | |
|--------------------|-----------|
| Light Distribution | : Type II |
|--------------------|-----------|

