

India's Lighting Company



**K-LITE**

*Elements*

DESIGN SERIES 2024

The environmentally friendly LED garden and pathway luminaires is both sustainability and user comfort. Its emphasis on creating a pleasant light distribution and high visual comfort, they cater to the needs of outdoor spaces while minimizing glare and discomfort for those in the vicinity.

#### MATERIAL

Body : Stainless Steel Pipe (grade 304) & Pressure die cast aluminium pyro top.  
Diffuser : Translucent acrylic  
Mounting : Die cast aluminium mounting base.

#### ELECTRICAL

Driver : Constant Voltage  
Power Supply : Non-Integral  
Operating Voltage : 24Vdc

#### PRODUCT CONFIGURATIONS

Wattage : 6W  
Light Distribution : Symmetrical  
CCT : 2700K / 3000K / 4000K / 5700K  
LED Life Time : L70 B10 60,000 H

#### AREA OF APPLICATION


Private residential areas : Flowerbeds, Entrances, Pathways, Gardens and others decorative landscape architectural applications.

#### AVAILABLE FINISH

Pure polyester powder coated  
RAL 9004 Signal black  
RAL 9007 Grey aluminium  
RAL 7016 Anthracite grey



**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)

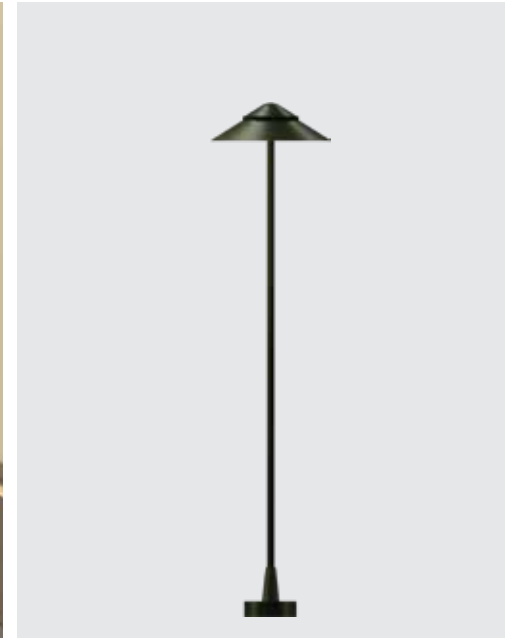

**Technical Specifications**

**General**

ID : 4560  
 System Wattage : 6W LED  
 Driver Non-Integral : Constant Voltage  
 Operating Voltage : 24Vdc  
 Operating Temperature : -15°C~+50°C

**Light Source**

Light Source : LUMILEDS / OSRAM  
 CRI (Ra) : ≥80  
 LED Colour Temperature : 2700K / 3000K / 4000K / 5700K

**Physical**

Body : Die-Cast Aluminium with Stainless Steel Pipe  
 Diffuser : Translucent acrylic  
 Mounting : Surface Floor  
 Finish : Polyester powder coated  
 RAL 9004 Signal black  
 RAL 9007 Grey aluminium  
 RAL 7016 Anthracite grey

**Driver**

Power Supply : Non-Integral

**Optical Performance**

Light Distribution : Symmetrical

