


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.49V I:0.6997A P:74.638W PF:0.4628 Freq:49.99Hz Lamp Flux:8596x1 lm		
NAME: LINEAR WALL WASHER	TYPE:LINEAR LIGHTING	WEIGHT:
SPEC.:WW, OSRAM	DIM.: 1000 x 48 x 118	SERIAL No.:4431
MFR.: K-LITE	SUR.:	Shielding Angle:15° x 30°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3066	Imax (cd)	15371	S/MH (C0/180)	0.84
NOMINAL POWER (W)	72	LOR (%)	68.9	S/MH (C90/270)	0.28
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	5922.3	η UP, DN (C0-180)	0.0, 34.0
NOMINAL FLUX (lm)	8596	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 34.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	68.9	CIBSE SHR MAX	1.00

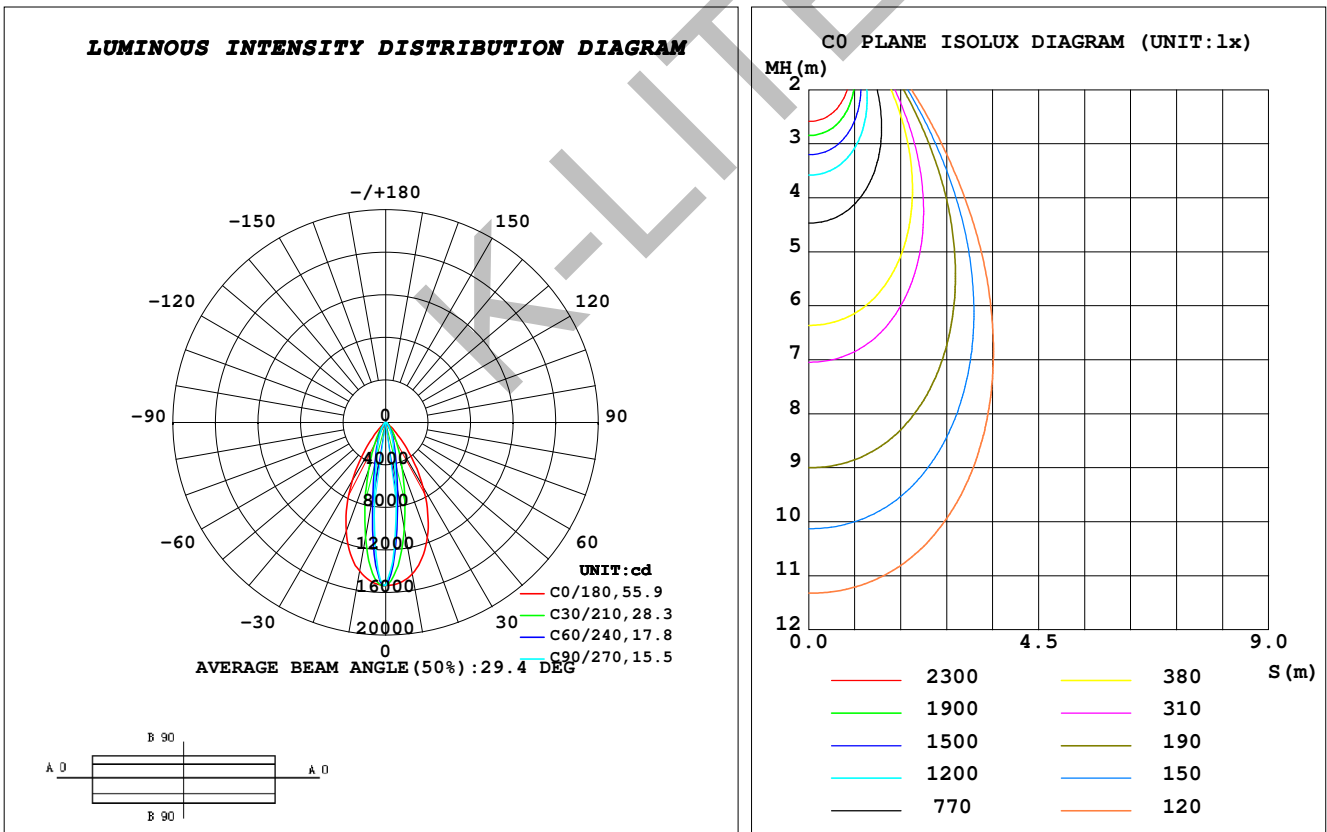

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 13 April 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: